

4. Mount Wall Bracket (dimensions 3.0"x1.7"x1.5") on vertical wall or to back of outlet boxes using provided screws. Apply AG140-002, as shown.(see Fig. 1-5)



Model:

**AG140-002**


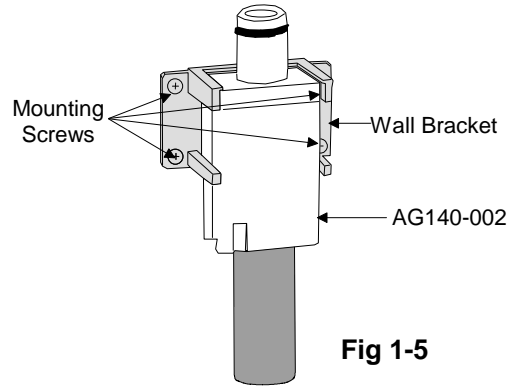



Fig 1-5

5. Install AG140-002 into 1-1/2" (or 2") drain pipe. (see FIG 1-6)

Fig 1-6

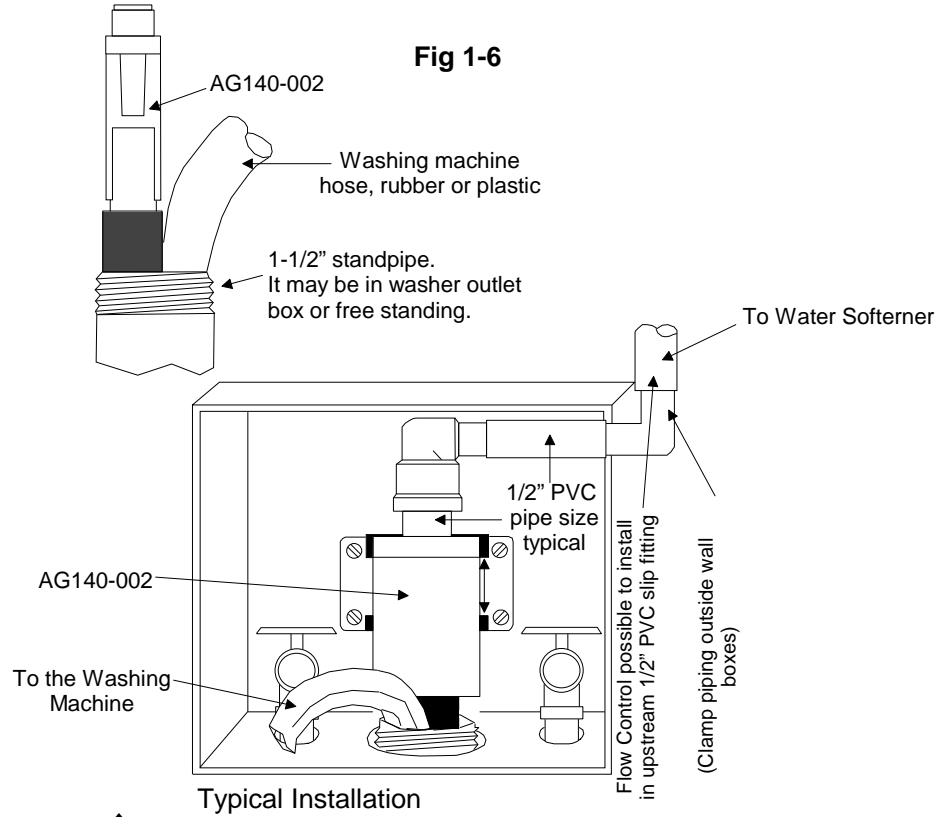

**1-1/2-INCH OR 2-INCH  
STANDPIPE  
UNIVERSAL 14 GPM AIR GAP**

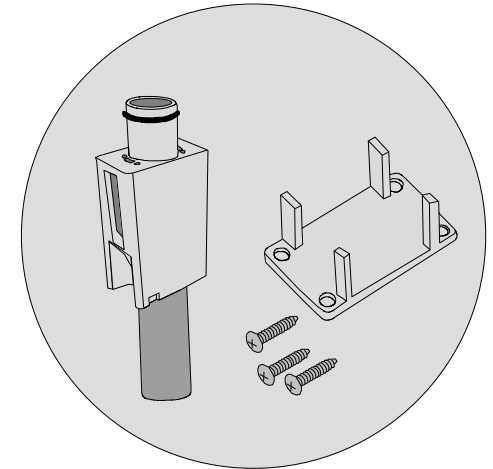

Old Part Number:  
GAP-IT, 61-S

Doc.#400-0810-001



# AG140-002

## Installation Procedures


### LIST OF PARTS ENCLOSED

1- Water Softener Air Gap

1- Wall Bracket

4- #8 X 1" ,Phillips Pan Head Screws

1- Rubber Hose, 4" Long , 7/8" ID

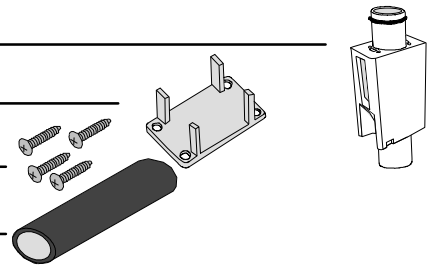

The AG140-002 is a water softener air gap, designed to share the drainpipe with a washing machine discharge tubing. The AG140-002 features a flow straightener to quiet and smooth out turbulent flow and splash shields to provide completely dry operation.




- Air gap fits into a recessed washing machine box with 1-1/2-inch or 2-inch standpipe
- Allow space for washer drain hook or soft rubber washer hose
- Tested at 15 GPM (56.8 Liter/minute)
- Recommended usage 7 GPM (26.7 Liters/minute)
- Inlet port fits 1/2" schedule 40PVC slip fitting with O ring
- UPC® listed and tested for compliance with IPC and NSF standards

Always comply with local plumbing codes during installation


Please read the instructions once through before starting.

### AG140-002 INSTALLATION INSTRUCTION

1. Make sure that the flow rate output of the water softener meets AG140-002 flow capacity limits.
2. Apply rubber hose provided on outlet port. For dimensions see FIG 1-1 and FIG 1-2.

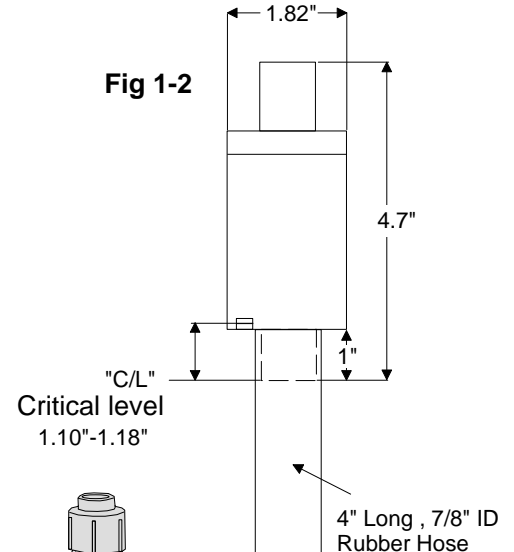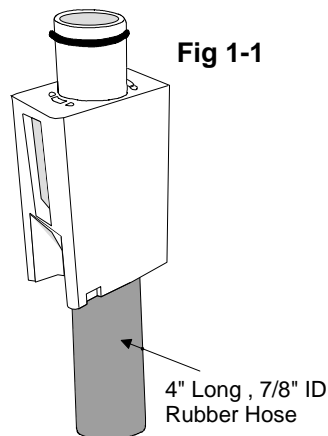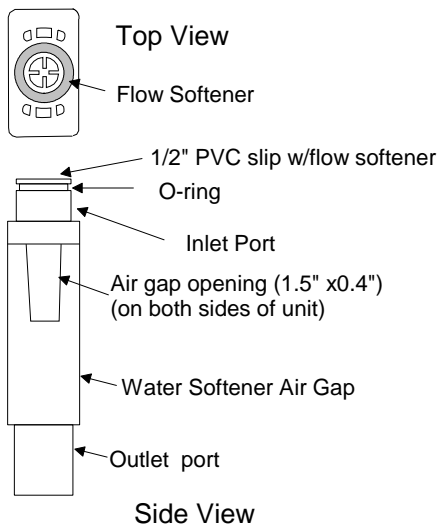

3. Inlet port fits 1/2" schedule 40PVC slip fittings.(see FIG 1-4)  
Connect inlet port of AG140-002 to the water softener.



-OVER-