

**Model:**

**AG250-403**


**TAP-A-TAP™  
KITCHEN PEDAL WITH  
CONSTANT FLOW LOCK  
STAINLESS STEEL FINISH**

Press the pedal on the right side to lock it in the open position, open the faucet, and adjust the desired water temperature and flow rate.

As long as the pedal is pressed, water will flow from the faucet.

To release the pedal, press on the left side.

When the pedal is released, the water flow stops.

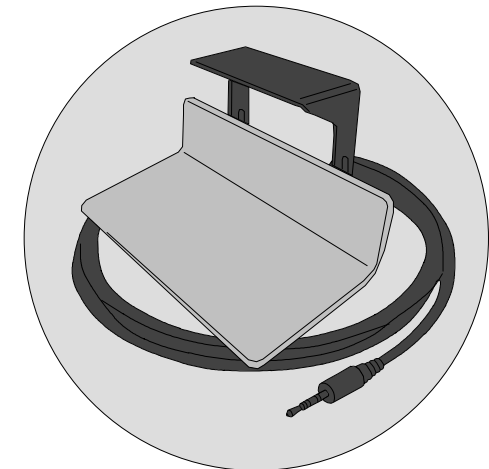

Part No.  
AG250-403

# AG250-403



## Installation Procedures

### LIST OF PARTS ENCLOSED

1 – Pedal assembly


1 – Top mounting plate

2 – #10 Mounting screws

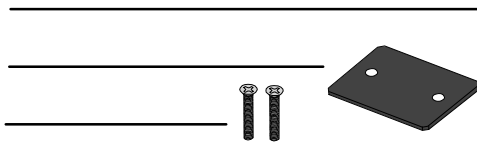

AG250-403  
Pedal

**The AG250-403, in combination with AG250-003 valve, provides hands-free faucet operation. AG250-403 has constant lock option. Valve is ordered separately.**



AG250-003  
Cold/Hot Potable Water  
Electrical Valve

Please read the instructions once through before starting.

### PEDAL INSTALLATION INSTRUCTIONS

1. Place the top mounting plate at the edge of the cabinet and mark the location of mounting screws. Drill two holes for #10 screws. (13/6-inch). (FIG.1 ) The pedal center should be between 6 and 10 inches offset from the cabinet center.

Drill hole 3/8-inch under the cabinet plate for cable connection to the valve. (FIG.1 )

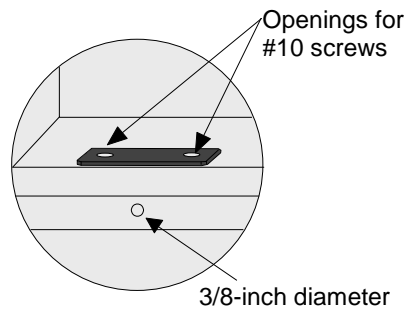


FIG. 1

3. Use provided #10 screws to attach pedal. (FIG.3)




FIG. 3

2. Pass cable from the AG250-403 pedal through the 3/8-inch opening under the cabinet plate and connect it to the AG250-003 valve installed inside the cabinet. (FIG.2)

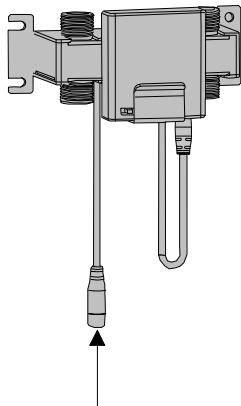


FIG. 2

4. The pedal position can be adjusted using four screws on the side of the pedal assembly. (FIG.4)

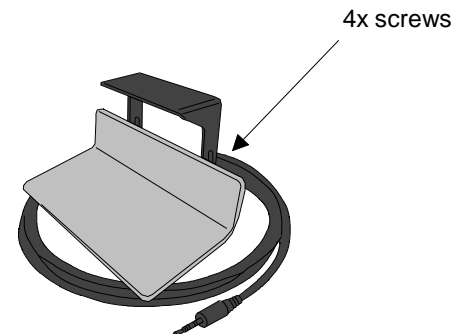



FIG.4