

## Rentals/Temporary and Permanent Installation Tips:

By using a 1-1/2-inch spigot trap adapter and no-hub coupling, the ET117-007 may be removed and the standpipe left in its original condition. You can unscrew the ET117-007 to check flow rates or re-install it at a new location even if a trap adapter or wye and trap adapter combination are permanently glued to the standpipe.

The two trap adapters provided with your ET117-007 will allow you to make a connection to any standpipe configuration encountered: use the close - 1/2-inch MIPT nipple in a threaded female fitting, the spigot adapter in a female slip fitting, and a hub adapter over ABS pipe. The Beveled washer and O-ring are interchangeable, but should not be used together.

### No-Hub connectors:

Ideal for cast iron or non-threaded galvanized steel, Copper, and ABS/PVC Pipe. With the use of non-hub Couplings, it is a simple procedure to splice into any drain line to fabricate a standpipe.

### Note:

In most residential applications, it is permissible to transition from metal to plastic using no-hub couplings; however, some commercial buildings require uniformity of materials throughout the drainage system, such as all no-hub cast iron pipe. For this reason, it is advisable to determine the specific code requirements for each job.

### List of materials useful to have on hand:

(These materials are inexpensive, easy to find, and take up very little space.)

2" No-Hub Coupling	2" ABS/PVC Combination Tee
2" x 1 1/2" No-Hub Coupling	2" x 1 1/2" ABS/PVC Combination Tee
1 1/2" No-Hub Coupling	1 1/2" ABS/PVC Combination Tee
2" ABS/PVC Wye (Hub or Street)	2" ABS/PVC Sanitary Tee
2" x 1 1/2" ABS/PVC Wye (Hub or Street)	2" x 1 1/2" ABS/PVC Sanitary Tee
1 1/2" ABS/PVC Wye (Hub or Street)	1 1/2" ABS/PVC Sanitary Tee
2" ABS/PVC P-Trap	2" ABS/PVC Sch-40 Pipe (5'-10')
1 1/2" ABS/PVC P-Trap	1 1/2" ABS/PVC Sch-40 Pipe (5'-10')
2" x 1 1/2" ABS/PVC Reducer Coupling	ABS Glue
2" x 1 1/2" ABS/PVC Flush Brushing	PVC Primer & Glue
1 1/2" ABS/PVC Street 45 (1/8 Bend)	1" Teflon Tape or Pipe Joint Compound

### Tools useful to have on hand:

- Sawzall Pipe/Tube Cutter or Hacksaw
- Channel Lock or Pipe Wrench
- No-Hub Wrench or Straight Screw Driver
- Tape Measure

MADE IN USA  
ASME A112.1.3



Copyright © AIRGAP INTERNATIONAL a Division of Altinex Inc.



Model:

# ET117-007

## 1/2-INCH BARB INLET 1-1/2-INCH OUTLET MULTIPURPOSE AIR GAP


Pat. No. 5,449,456  
Pat. No. 5,681,459  
Pat. No. 5,944,985  
Pat. No. 6,193,879

MADE IN USA



ASME A112.1.3

► For Schedule – 40  
Standpipe Installation



Old Part Number:  
G-50BA  
DLA-G™







Doc. # 400-0730-006

# ET117-007

## Installation Procedures

For Stand Pipe Applications


### LIST OF PARTS ENCLOSED

- 1 – Air gap with 1/2-inch Barb Connection ----- 
- 1 – 1-1/2-inch Schedule – 40 (Hub x Male Pipe Thread) ABS Trap Adapter ----- 
- 1 – 1-1/2-inch Schedule – 40 (Spigot x Male Pipe Thread) ABS Trap Adapter ----- 
- 1 – 1-1/2-inch Slip Joint Wing Nut ----- 
- 1 – 1-1/2-inch Slip Joint Beveled Washer ----- 
- 1 – 1-1/2-inch Nitrile O-Ring (for alternate use instead of washer) ----- 

- **The ET117-007 provides an air gap for all Schedule-40 DWV standpipes.**
- **These instructions are intended for a professional installer. Examples are provided without giving details of every procedure.**

The standpipe used with an ET117-XXX Series air-gaps must be trapped, vented and fabricated from a Schedule-40 Drain Waste and Vent material that has been approved in your area, such as: ABS, PVC, galvanized steel, copper, or no-hub cast iron with an inside diameter of 1-1/2-inch or greater. This will ensure compliance with plumbing code requirements.

### Below are the three practical standpipe configurations:

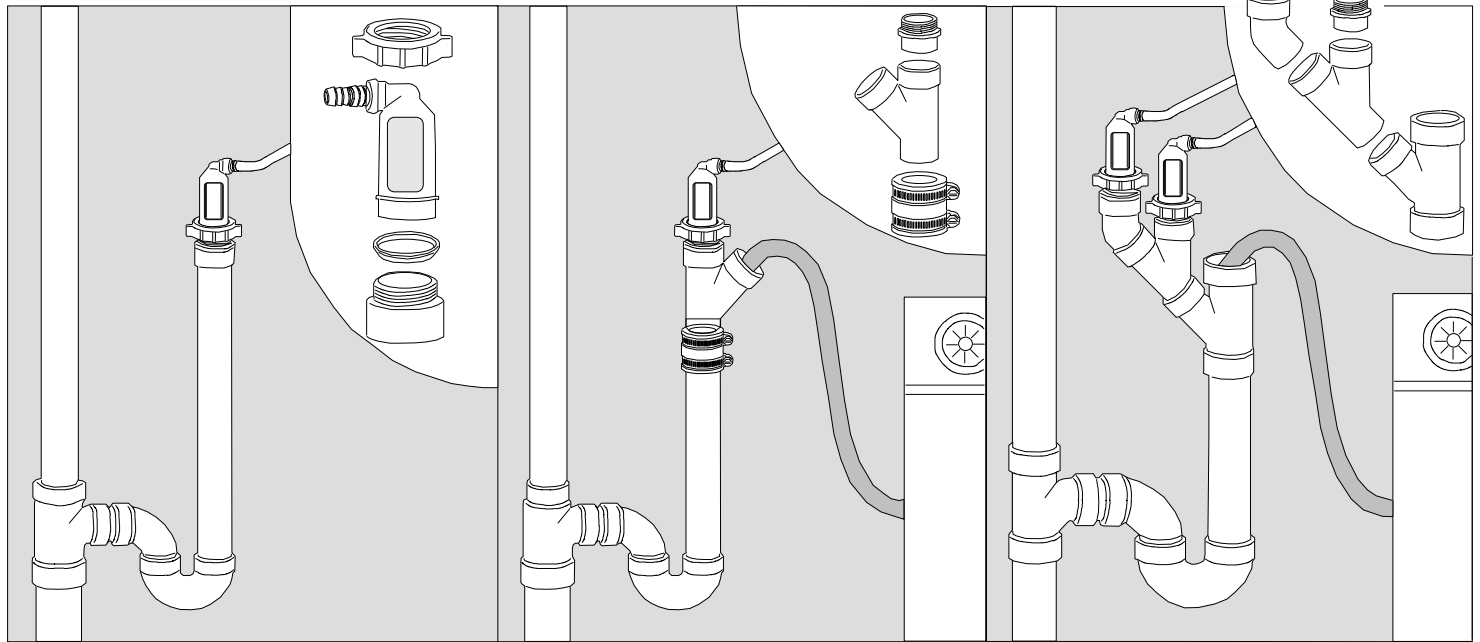

### The examples below:

Combination residential water softener / RO / washing machine drain configurations

