

**CAUTION:**

Use an approved ABS to PVC transition cement such as Oatey or Hercules which is NSF Certified and meets ASTM D 3138 when connecting to PVC pipe.

**IMPORTANT:**

The ET120-001 general-purpose standpipe air gap is designed for residential and commercial water treatment equipment and condensate lines that require an air gap discharge to the drain. The ET120-001 air gap is perfect for applications where a rigid Schedule-40 pipe must be plumbed to an approved air gap device. The ET120-001 provides a convenient, ready-made, true air gap for all Schedule-40 DWV standpipes.

The general-purpose standpipe air gap provides many advantages and ensures safety and peace of mind that your water supply is uncontaminated. These advantages include:


- Designed to allow water to flow only in the desired direction
  - Strong material to provide durable connection
  - Protection against splash or spray through the air gap window
  - Tested and listed for compliance with applicable plumbing codes
- Legal to install in any state
- The ET120-001 general-purpose standpipe air gap is listed by UPC® and tested for compliance with IPC® and NSF® standards.

Serving the  
Reverse Osmosis  
Water Treatment Industry

MADE IN USA



Copyright © AIRGAP INTERNATIONAL a Division of Altinex Inc.

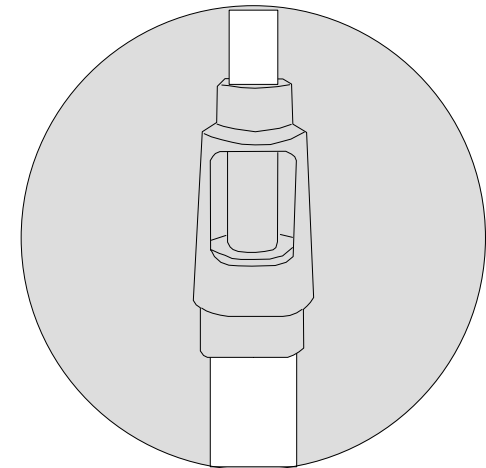**Model:****ET120-001****GENERAL-PURPOSE  
AIR GAP****(Maximum flow rate 22 GPM)****MADE IN USA****1-INCH THREAD**

Old Part Number:  
G-200  
DLA-G20

**2-INCH SLIP**

# ET120-001


## Installation Procedures

---

### LIST OF PARTS ENCLOSED

---

1 – General-purpose air gap-----



- *The ET120-001 is a general-purpose air gap for use with water softeners, iron filters, water heaters, ice makers, and water filters.*
- *To install the ET120-001 general-purpose air gap, follow instructions in this user guide.*

### Installation

1. Make sure that the drain pipe has P-trap installed.
2. The ET120-001 should be installed at least 18 inches above the P-trap to avoid water splashing back from the air gap.
3. Insert the ET120-001 air gap vertically. For permanent installations, use approved PVC glue.
4. To avoid splashing noise, install a 22 degrees elbow between the air gap and the P-trap.

